

DURiTE ECO

ECO4 1.4W



FEATURES

- Starux's Constant Current drive with protection LED for long life time
- Ensures excellent transmittance and uniform lighting
- 160 degree angle lens that spreads light evenly for no hot spots
- Specially designed durable cover that withstands harsh environment and protects the LED
- High luminous efficacy guaranteed up to 95 lm/W
- Easy installation with double sided 3M tape and screw holes
- IP68 Waterproof and approved by UL, CE, RoHS
- Long life time 50,000 hours

DESCRIPTION

DURiTE ECO Series is Specialized for Channel Letter Signs.

The LED is powered by Reliable LED that makes high performance and durability as Tier 1 LED.


Starux's most cost-efficient model and easy installation with double sided 3M tape.

The ultrasonic welding technology performs for excellent waterproofing and protects LED from harsh environment.

SPECIFICATIONS

Model	ECO4 1.4W	Module Spacing	2 pcs/ft
Colors	10000K	Demension	1.8" x 1.57" x 0.43"
Lumens	95 lm/Mod	Weight	11g
Power	1.4W	Max in series	50 Mods
Input Voltage	12V DC	Operating Temp.	-4°F ~ 122°F / -20°C ~ 50°C
CRI	>80 Ra	Life Time	50,000
Beam Angle	160°	IP Rating	IP68 Waterproof

DIMENSION

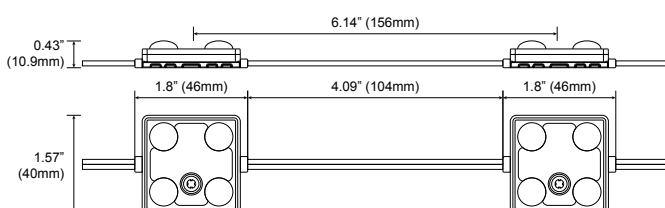

COVERAGE CHART

Depth	5"	6"	7"	8"
Max Stroke Single Row	14"	16"	18"	20"
Max Stroke Multi Rows	12"	14"	16"	18"
Mods per ft	2 pcs per ft			

Parameters can be adjusted according to the desired brightness.